


SSEL Tender Ref: Q240074_VE

Date: 7th Oct 2024

Client: Fit Out UK Ltd.

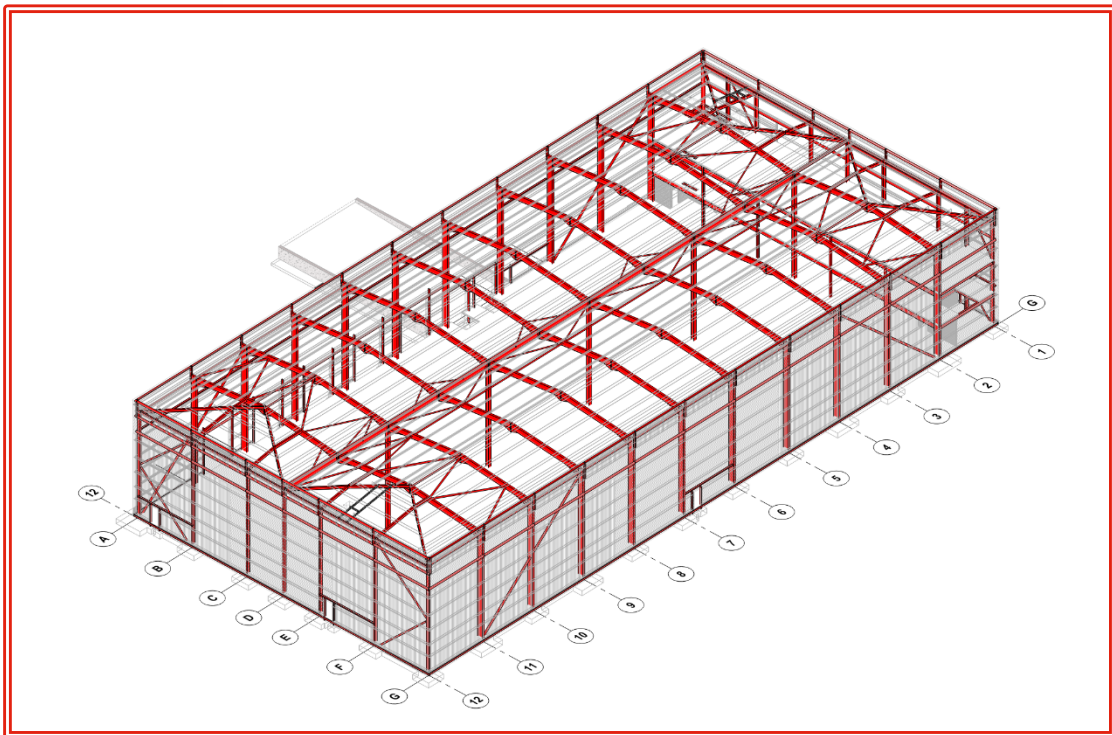

Tender Submittal
Doncaster Unit 04 (VE Option)

Date: 7th October 2024

Fit out UK Ltd.

27 Abbey Rd,
London
NW10 7SJ,
United Kingdom

Attention: Luke Salmon

RE: Doncaster Unit 04 Structural Steelwork & Cold Rolled Package

Dear Luke,

We thank you for your enquiry and invitation to tender for the structural steelwork package associated with the above-referenced project. Please find attached our Value Engineering (VE) tender proposal for your consideration.

This submission incorporates cost optimizations identified through our VE exercise, resulting in a revised total price of **£375,854**. These VE adjustments have been developed by an independent engineer and are subject to approval by the principal engineer, as detailed in Appendix 09.

This VE option aims to provide cost savings while maintaining the integrity and safety of the structural steelwork. The pricing is based on VE options that have been reviewed to ensure compliance with all project requirements and quality standards.

Our pricing is strictly net of discounts and exclusive of Value Added Tax. Details of our pricing can be found in **Section 1** of the proposal.

Our prices are based on current day rates for all raw materials and the information provided at the time of tender. Should there be any significant changes in material costs or project specifications, we will inform you promptly and adjust our proposal accordingly.

We trust we have interpreted your requirements correctly. Should you require any further information or clarification, please do not hesitate to contact us.

Yours faithfully,

Andrew Thompson
Senior Quantity Surveyor
Struct Steel Engineering Ltd

Address:
38 Farnamullan Road
Lisbellaw, Co. Fermanagh
BT94 5FT

Contact Details:
Phone: (028) 6638 7001

Email: andy@structsteeleng.co.uk
Website: <https://structsteeleng.co.uk/>

Registration Details:

Registered in Northern Ireland No: NI647018
VAT Registration No: 280 3670 07



Table of Contents

1. Price Proposal.....	- 5 -
2. Scope of Works.....	- 5 -
3. Exclusions and Clarifications	- 7 -
4. Conditions of Proposal	- 9 -
5. Schedule of Daywork Rates.....	- 10 -
6. Programme and Timeline.....	- 12 -
7. Payment Terms	- 12 -
8. Design and Engineering Responsibility	- 13 -
9. Appendices	- 13 -

Date: 7th October 2024
Reference: Q240074_VE

Confidentiality Notice: This tender proposal and its contents are confidential and intended solely for the recipient. Any unauthorized review, use, disclosure, or distribution is prohibited. If you are not the intended recipient, please contact the sender and destroy all copies of



1. Price Proposal

Fixed Lump Sum Price

Struct Steel Engineering Ltd. is pleased to submit our tender for the Doncaster Unit 04 on a fixed lump sum basis. Our pricing is exclusive of VAT and includes all costs associated with the supply, fabrication, and erection of structural steelwork as outlined in the Scope of Works.

Summary of Pricing:

- **Steel:** £291,449
- **Steel Fittings:** £25,025
- **Cold Rolled Purlins:** £59,380
- **Total: £375,854**

Notes:

The fixed lump sum price is based on the information provided at the time of tender and current market rates. The provided Bill of Quantities (**Appendix 01**) will form the basis for pricing any changes. A post-tender additions and omissions exercise will be undertaken and recorded as a variation, utilizing the tender BOQ to evaluate and price these additions and omissions.

Additionally, the fixed lump sum price is based on the quantities derived from the engineering drawings as referenced in **Appendices 02 to 08**. This ensures that our pricing accurately reflects the detailed project specifications. Any deviations from these drawings will be addressed through Variation Orders, using the tendered BOQ as the basis for evaluating and pricing the additional columns.

For any additional variations that arise during the project, we will endeavor to use the existing BOQ or daywork rates where applicable. If no suitable rates are available within the current BOQ or SoR, we will provide a detailed breakdown for new rates through comprehensive cost analysis, ensuring they reflect current market conditions and project requirements.

Value Engineering Adjustment:

We have conducted a Value Engineering (VE) exercise to optimize project costs without compromising quality or safety. This VE initiative was performed by an independent engineer and is contingent upon approval by the principal engineer. The approved VE changes have been incorporated into the revised engineering drawings, detailed in **Appendix 09**.

2. Scope of Works

The following outlines the comprehensive scope of works included in our tender proposal. All items listed are included unless otherwise stated.

2.1 Supply, Fabrication, and Erection of Structural Steel Elements

We will supply, fabricate, and erect all structural steel elements as detailed in the structural engineer's drawings, including but not limited to primary steel members (beams, columns, bracing) and secondary steel members. This includes the supply of cold rolled purlins, ensuring their integration into the overall structural framework. All steel elements will be fabricated in compliance with BS EN 1090-2, Execution Class EXC2 (or EXC3 if required), ensuring adherence to the highest quality and safety standards.

We will provide all necessary bolts, fixings, anchors, and accessories required for the erection of the steelwork, excluding concrete to steel anchors. Concrete to steel anchors are not included in our tender submission. Additionally, coring concrete to receive these concrete anchors is excluded from our scope of work.

In the Republic of Ireland (ROI), anchors into concrete holding another component in place are defined as Safety Critical and require specific design from approved anchor suppliers (e.g., Hilti/Fischer) and specific approval by the Design team. These requirements are **not included** in our scope and must be managed by the Main Contractor.

2.2 Surface Treatment

We will apply primer paint to all structural steel components, achieving a nominal dry film thickness of 75 microns, unless specified otherwise. Galvanizing of steel components will be carried out where specified, in accordance with BS EN ISO 1461.

2.3 Connection Design and Engineering

Our responsibility includes the design and detailing of standard steel-to-steel connections, in accordance with the structural engineer's intent and relevant codes of practice. We will also design and provide any temporary works required for the safe erection of the steelwork, including temporary bracing and supports.

2.4 Metal Decking and Shear Studs

Excluded from our scope [*Can be supplied and fitted by SSEL if required*].

2.5 Cladding and Roofing Works

Excluded from our scope.

2.6 Miscellaneous Metal Works

Excluded from our scope [*Can be supplied and fitted by SSEL if required*].

2.7 Delivery to Site

We will coordinate the delivery of fabricated structural steel and associated materials to the site using appropriate transport vehicles. Deliveries will align with the agreed program timeline, ensuring

timely arrival and efficient sequencing with on-site activities. Unloading of materials on-site will be carried out using suitable equipment.

2.8 Erection of Steelwork

Our in-house team of experienced steel erectors will carry out the installation. We will provide all necessary plant and equipment, including a **60-tonne crane** and **2 standard S60 Mobile Elevated Work Platforms (MEWPs)**.

- **If a larger crane is required** due to accessibility issues, Main Contractor requirements, or client programming and sequencing of works, this will be deemed to be a variation and charged accordingly.
- **If additional equipment or plant** is needed beyond what is specified, this will be treated as a variation and subject to additional costs.

2.9 Quality Assurance and Compliance

We will implement a Quality Assurance Plan, including inspections at fabrication and erection stages. Material test certificates, welding qualifications, and inspection reports will be provided. We will adhere to all relevant British Standards, Eurocodes, and project specifications.

2.10 Health, Safety, and Environmental Management

We will prepare Risk Assessments and Method Statements (RAMS) for all activities, ensuring all personnel are trained and competent for the tasks assigned. Measures will be implemented to minimize environmental impact, including waste management and noise control.

For further details on the scope, please refer to the associated appendices.

3. Exclusions and Clarifications

To ensure clarity, the following items are expressly excluded from our proposal and are to be provided by others unless otherwise agreed upon in writing.

3.1 Exclusions

- **Fire Protection:** Intumescent coatings, fireproof paint, and any additional fire protection materials or treatments beyond the primer specified; fire-stopping materials and installations.
- **Architectural and Finishing Works:** Painting or coatings beyond the specified primer; application of decorative finishes or treatments.
- **Metal Decking:** Supply and installation of metal decking;
- **Cladding and Roofing Works:** Supply and installation of cladding and roofing systems; rainwater goods, gutters, and downpipes.
- **Groundworks and Civil Works:** Groundworks, piling, foundations, and site preparation; grouting of base plates and any civil or concrete works associated with the project.

- **Temporary Works and Access Systems:** Provision of scaffolding, edge protection, safety netting, fall arrest systems, and access towers; design and provision of temporary works not directly associated with steel erection.
- **Design Responsibilities Beyond Steelwork:** Overall structural design, member sizing, and global stability analysis; connection design beyond standard steel-to-steel connections (e.g., steel-to-concrete, steel-to-timber).
- **Site Services and Facilities:** Site surveys, setting out, and provision of gridlines or benchmarks; provision of site welfare facilities, offices, storage areas, and security.
- **Mechanical and Electrical Works:** M&E supports, brackets, and installations; penetrations, openings, and coordination with M&E services.
- **Testing and Certification Beyond Standard Scope:** Non-destructive testing (NDT) beyond our standard quality procedures; load testing of structures or components.
- **Materials and Works by Others:** Supply of proprietary items unless specified (e.g., prefabricated staircases, pre-cast concrete elements); installation of equipment or machinery.
- **Environmental and Planning Permissions:** Obtaining planning permissions, environmental permits, or consents; archaeological surveys or investigations.
- **Removal of Existing Structures:** Demolition or dismantling of existing structures or obstructions.
- **Insurance Beyond Standard Coverage:** Insurance for consequential losses, liquidated damages, or delays caused by others.

3.2 Clarifications

- **Access and Egress:** Main Contractor to provide clear and unrestricted access for the delivery and erection of steelwork, including suitable hardstanding areas for cranes and equipment. Any necessary road closures, traffic management, or special access arrangements are to be provided by others.
- **Working Hours:** Our proposal is based on standard working hours (8:00 AM to 5:00 PM, Monday to Friday). Work outside these hours, including weekends or night shifts, may attract additional costs.
- **Utilities and Services:** Provision of necessary utilities such as electricity, water, and lighting to our working areas is assumed to be supplied by others at no cost to us.
- **Site Conditions:** The site is assumed to be level, clear, and prepared, suitable for our operations. Any unforeseen ground conditions, obstructions, or contamination are excluded.
 - **CBR Testing of ground conditions** will be carried out by Main Contractor and results provided to SSEL for inclusion in their Lifting Plan.
- **Weather and Environmental Conditions:** Our pricing does not include allowances for extreme weather conditions beyond normal UK weather patterns. Delays caused by adverse weather may necessitate program adjustments.
- **Coordination with Other Trades:** Coordination and integration with other trades are limited to reasonable levels. Any extensive coordination, meetings, or redesigns required due to other trades are excluded.
- **Design Information:** All necessary design information, specifications, and drawings will be provided in a timely manner. Delays or errors in provided information may impact the program and costs.
- **Statutory Approvals:** All permits are solely and entirely the responsibility of the Main Contractor. Permits include but are not limited to:
 - Hot Work Permits *{Firewatch to be provided by Main Contractor}*

- Permit(s) required for working in the vicinity of specialised sensitive equipment.
- Permit(s) required for Road Closures
- Permit(s) required for working in the vicinity of an airport.
- Permit(s) required for working within the vicinity of a railway line or train station.
- **Waste Disposal:** Disposal of waste generated by our activities will be managed in compliance with regulations, but the provision of on-site waste facilities is assumed to be by others.
- **Health and Safety File:** Main Contractor to carry out full survey of HD Bolts as soon as they are installed and survey to be issued to SSEL prior to steel being dispatched to site.


3.3 Project-Specific Clarifications

Internal Column Clarifications

There is a discrepancy in the engineering drawings regarding the placement of internal columns:

- Drawing 13130-064 C1 (as shown in the second snapshot below) indicates a column at every bay location, totalling 10 columns.
- Ground Floor Column Drawing 13130-070 C1 (as shown in the first snapshot below) specifies columns at every second bay location, totalling 5 columns.

For clarity SSEL has based our pricing on Ground Floor Column Drawing 13130-070 C1, which includes 5 columns. Should there be any changes requiring additional columns, SSEL will address these adjustments through a post-tender Variation Order utilizing the tendered BOQ and Schedule of Rates as the basis for evaluating and pricing the additional columns.

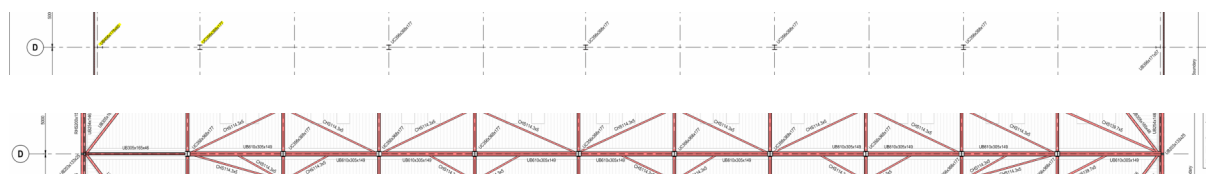

Galvanizing

We have assumed a **galvanizing finish** for the **base PFC and SHS members only**. Any additional galvanizing requirements outside of these components will need to be addressed separately.

4. Conditions of Proposal

4.1 Validity of Offer

This offer is valid for 30 days from the date of submission. After this period, we reserve the right to review and adjust pricing based on material cost fluctuations and market conditions.

4.2 Lead Times

Material lead times are estimated at 6–8 weeks from receipt of final approved drawings. Delays in approvals or client-initiated variations may affect the timeline.

4.3 Variations

Any alterations to the agreed scope, design, or specifications will be treated as variations. Variations may incur additional costs and extend the project timeline.

4.4 Material Procurement

Our pricing is based on current material rates as of the date of this tender. Any significant changes in steel prices prior to procurement may necessitate price adjustments, which will be communicated promptly.

4.5 Payment Terms

Payments are due as outlined in **Section 7**. An agreed schedule of payment dates will be established in collaboration with the client and included in the contract, outlining specific dates and amounts for each payment instalment. All payments must be settled within 30 days of the invoice date, unless otherwise agreed upon in writing.

5. Schedule of Daywork Rates

For additional work outside the agreed scope or due to variations, the following daywork rates apply.

5.1 Labour Rates

- **Project Manager:** £60/hour
- **Site Manager:** £60/hour
- **Site Engineer:** £60/hour
- **Site Foreman:** £55/hour
- **Steel Erector:** £50/hour
- **Welder:** £50/hour
- **Fabricator:** £55/hour
- **Detailer:** £65/hour
- **Design Engineer:** £70/hour
- **Painter:** £40/hour

5.2 Plant and Equipment Hire

Mobile Cranes

- **50-ton Mobile Crane:** £950/day
- **80-ton Mobile Crane:** £1,250/day
- **100-ton Mobile Crane:** £1,500/day
- **120-ton Mobile Crane:** £1,800/day
- **150-ton Mobile Crane:** £2,100/day

Mobile Elevated Work Platforms (MEWPs)

- **HR15 (15m Working Height):** £90/day
- **HR17 (17m Working Height):** £100/day
- **HR21 (21m Working Height):** £120/day
- **HR28 (28m Working Height):** £150/day
- **Scissor Lift (12m):** £80/day
- **Scissor Lift (20m):** £100/day
- **Articulated Boom Lift (Telescopic) 24m:** £140/day

Telehandlers and Forklifts

- **Telehandler (9m Reach):** £80/day
- **Telehandler (14m Reach):** £100/day
- **Forklift (5-ton):** £70/day

Additional Equipment

- **Generators (20 kVA):** £50/day
- **Welding Plant (Arc Welder):** £40/day
- **Compressors (Medium Duty):** £35/day
- **Site Lighting Equipment:** £30/day

Transport

- **Hiab Lorry (Self-loading):** £400/day
- **Flatbed Lorry:** £350/day

Miscellaneous

- **Safety Barriers and Fencing (per 50m):** £25/day
- **Edge Protection Systems:** £35/day

Note: Fuel and consumables are charged at cost plus 20%. Any items or services not listed above will be charged at cost plus 20%, based on supplier invoices.

Clarifications

- **Rates Currency:** All rates are in Pounds Sterling (£). If the project is in the Republic of Ireland and requires rates in Euros (€), please adjust accordingly using the current exchange rate.

- **Rates Validity:** The rates provided are estimates based on typical industry standards in Northern Ireland and Ireland as of October 2023. Actual rates may vary depending on supplier availability, project location, and market conditions.
- **Operator Charges:** Operators for plant and equipment are not included in the hire rates and will be charged separately under **Section 5.1 Labour Rates**.
- **Minimum Hire Periods:** All plant and equipment hire rates are based on a minimum hire period of one day. Longer-term hire rates can be negotiated upon request.
- **Overtime and Weekend Work:** Additional charges may apply for equipment used during overtime hours, weekends, or public holidays.

6. Programme and Timeline

A detailed programme will be developed in collaboration with the main contractor as site start dates and key project milestones become defined.

7. Payment Terms

7.1 Payment for Raw and Fabricated Materials

Payments for raw and fabricated materials will be claimed monthly. Each claim will be supported by relevant documentation, including:

- **Model Lists:** Detailed lists of materials delivered.
- **Redacted Delivery Documents:** Secure copies provided to subcontractors for raw steel.
- **Load Lists:** Comprehensive records of fabricated steel delivered on-site.

All materials procured will be appropriately labeled off-site, indicating they are vested on your behalf. Representatives are welcome to conduct vesting visits to inspect and verify the materials.

7.2 Rates and Calculations

A pre-agreed rate per tonne, specific to each project, will be established in advance. These project-specific rates will align with our overall average rate per tonne to ensure transparency and consistency. Payments will be calculated based on the agreed rates and the actual quantities delivered and fabricated.

7.3 Payment Schedule and Conditions

- **Monthly Claims:** Submitted monthly with all necessary documentation.
- **Payment Due Date:** Within 30 days of claim submission.
- **Payment Method:** As mutually agreed in the contract.

To ensure accuracy, all claims will reference the pre-agreed rates and actual quantities. Appendix B outlines the Schedule of Rates (SoR), detailing average and project-specific rates per tonne.

8. Design and Engineering Responsibility

Our responsibility includes the design of steel-to-steel connections only. The client's responsibility encompasses structural analysis, member sizing, load calculations, and overall structural design. Any additional design work beyond steel-to-steel connections will be treated as a variation, potentially affecting cost and timeline.

9. Appendices

Appx. 011. Q24074_Doncaster Unit 04_ BoQ.pdf
Appx. 0213130-063 C1 Unit 4 -Upper Floors Plans.pdf
Appx. 0313130-064 C1 Unit 4 - Roof Plan.pdf
Appx. 0413130-065 C1 Unit 4 - Elevations Sheet 1.pdf
Appx. 0513130-066 C1 Unit 4 - Sections Sheet 1.pdf
Appx. 0613130-069 C1 Unit 4 - 3D Views.pdf
Appx. 0713130-070 C1 Unit 4 - Ground Floor Column Layout.pdf
Appx. 0813130-S2 - Structures Issue Sheet-27-09-2024.pdf
Appx. 09 24-170 Unit 4 Premier Park - Value Engineering Steel Markups